

J.L.Fisher

Motion Picture &
Television Equipment

MODEL 9 CAMERA DOLLY

OUR LARGEST HYDRAULIC LIFT DOLLY

The Model 9 is our largest camera Dolly. It is a stable, reliable camera platform with a variety of features and accessories. This Dolly is widely known for its use in television production and has provided the industry with a long history of reliable service. A new feature of the Model 9 Dolly is a smoother hydraulic system that includes a dampening valve which cushions the top and bottom of the lift. The Model 9 Dolly is easy to maneuver, dependable, requires low maintenance and continues to meet the needs of professionals in the motion picture, television and video industries.

500 LB (227kg) LIFT BEAM CAPACITY



STEERING MODES

REAR (CONVENTIONAL):

Front wheels are locked, rear wheels can rotate 360°.



REAR

CRAB:

Front and rear wheels can rotate in unison 360°.



CRAB

ACCEPTS 90 TO 240 VOLTS AC OR DC
TO CHARGE THE HYDRAULIC LIFT SYSTEM
IN AS LITTLE AS THREE MINUTES

8 SEAT MOUNT LOCATIONS

4 WAY
LEVEL HEAD

REMOVABLE PUSH POSTS

UTILITY HOOKS

CABLE CLIPS ON BEAM

SLIDING, CLOTH COVERED
CUSHIONED SEATS WITH
ADJUSTABLE HEIGHT

CARPETED
STANDING AREAS

SINGLE LEVER
POSITIVE LOCKING
BRAKE SYSTEM


BATTERY BOX



PUSH POSTS DOUBLE AS
REAR CARRY HANDLES



POSITIVE LOCKING BRAKES

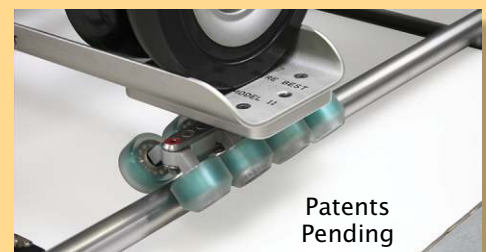

Patents
Pending

FULLY ARTICULATED SKATEBOARD WHEELS



MITCHELL MOUNT LEVELING HEAD WITH 4 WAY ADJUSTMENT AND 360° ADJUSTABLE DIAMOND PLATE

FIVE LIFTS PER SYSTEM CHARGE

SELF-BLEEDING HYDRAULIC SYSTEM

500 lb. (227kg) LIFT BEAM CAPACITY

LIFT BEAM POSITION (CUE) INDICATOR

SELF-DAMPENING LIFT BEAM SYSTEM

PNEUMATIC TIRES



LEVELING HEAD CAN BE REVERSED



SELF CENTERING HYDRAULIC LIFT BEAM CONTROL KNOB WITH SAFETY LOCK

OPTIONAL UP/DOWN LEVER WITH SAFETY LOCK




HYDRAULIC HAND PUMP FOR LOCATION WORK



The Model 9 Dolly has a maximum load capacity of 1200 lbs. (544 kg)



LIFT BEAM (CUE) INDICATOR

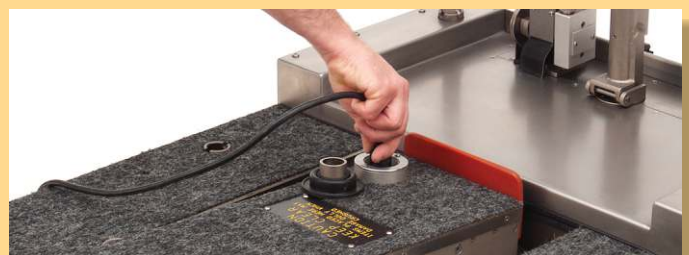


Power Requirements: 90 TO 240 VOLTS AC OR DC

STANDARD RENTAL PACKAGE

The Standard Rental Package includes these items:

- | | | |
|---|-----|-------------------------|
| 1 | SLT | 4-way Level Head |
| 1 | HS | Hand Screw (for SLT) |
| 2 | S | Large Seats |
| 2 | PP | Push Posts |
| 2 | L | Low Side Boards |
| 2 | F | Front Boards |
| 2 | H | High Side Boards |
| 2 | CH | Carry Handles |
| 1 | PC | Power Cord |
| 1 | BPR | Knee Bumper |
| 2 | AWR | Allen Wrenches |
| 4 | FW9 | Pneumatic Tires (front) |
| 4 | RW9 | Pneumatic Tires (rear) |
| 1 | BRN | Battery Box |

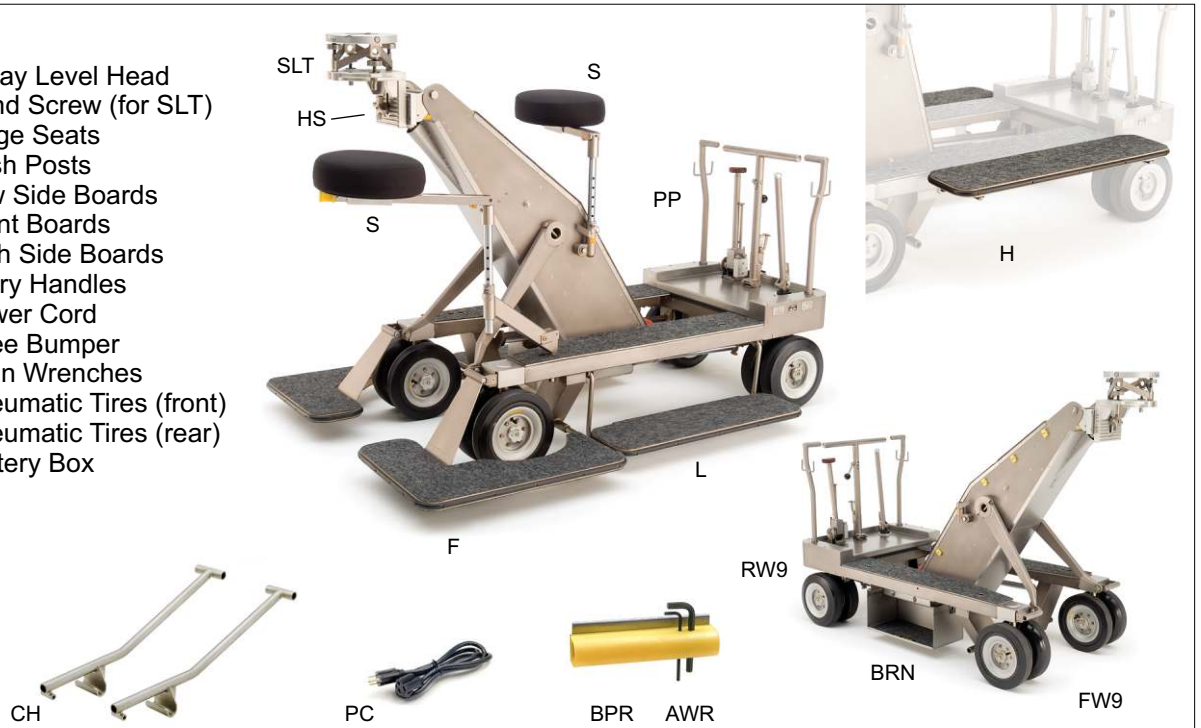**OPTIONAL ACCESSORIES***Asterisk indicates items are included in the **FULL RENTAL PACKAGE****Dolly Boards & Platforms**

- | | |
|------|-----------------------------|
| BS* | Beam Step Standing Platform |
| DBL* | Diving Board, Left |
| DBR* | Diving Board, Right |
| NFB* | Front Board Bridge |
| FP | Front Porch |


BS*



DBL/DBR*



NFB*

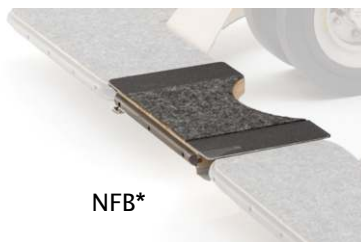

FP

**Scooter Board**

SCOA Scooter Board with Articulating Wheels

- 4-sets Articulating Wheels
- Mitchell Mount
- 4-Tie downs
- 4-Speed rail receivers
- 4-Carrying handles
- 44-3/8" pre drilled holes for high hats and other accessories
- 3-Tripod foot locators
- 34½" W x 53" L

SCOA



SCOA and SBWS

All 32 wheels maintain contact on both straight and curved round track.

MORE OPTIONAL ACCESSORIES

*Asterisk indicates items are included in the FULL RENTAL PACKAGE

Risers

R3	Camera Riser, 3" (7.6cm)
R6*	Camera Riser, 6" (15.2cm)
R12*	Camera Riser, 12" (30.5cm)
R6BA	Camera Riser w/ 75mm Ball Adapter, 6" (15.2cm)
R6BB	Camera Riser w/ 100mm Ball Adapter, 6" (15.2cm)
R6BC	Camera Riser w/ 150mm Ball Adapter, 6" (15.2cm)
R12BA	Camera Riser w/ 75mm Ball Adapter, 12" (30.5cm)
R12BB	Camera Riser w/ 100mm Ball Adapter, 12" (30.5cm)
R12BC	Camera Riser w/ 150mm Ball Adapter, 12" (30.5cm)
RJ6	Heavy Duty Camera Riser, 6" (15.2cm)
RJ12	Heavy Duty Camera Riser, 12" (30.5cm)
RJ18	Heavy Duty Camera Riser, 18" (45.7cm)
RJ24	Heavy Duty Camera Riser, 24" (61cm)
RJ36	Heavy Duty Camera Riser, 36" (91.4cm)



Angle Plate

AP*	90-Degree Camera Angle Plate
-----	------------------------------



Offsets

U*	Camera Offset, 10" (25.4cm)
TH*	Camera Offset, 24" (61cm)
RO*	Rotating Offset
ROB	Rotating Offset w/ Ball Adapter, 150mm
ROL	Rotating Offset, Low
ROHL	Rotating Offset, High/Low
ROX	Rotating Offset, Long
ROXL	Rotating Offset, Long, Low
ROP	Rotating Offset, Pivot



Adapters

75A	75mm Ball Adapter
100A	100mm Ball Adapter
150A	150mm Ball Adapter
UA	Universal Adapter
HBA	Half-Ball Adapter
ESLT	Euro Boss Adapter
MEA	Mitchell Euro Adapter



Low Level Head

LHN*	4-way Low Level Head
LHA	Low Head Adapter
WAT	Waffle Adapter




Seat & Seat Accessories

RS	Rotating Seat
SOH*	Seat Offset High
SOL	Seat Offset Low (Includes Seat)
SOS*	Seat Offset Straight
SSOS	Seat Offset Short
SR6*	Seat Riser Adjustable
BR/MLA	Seat w/Backrest & Adapter (for use w/SLT only)
SBKR	Seat w/Backrest

Jib Arms

JIB23 Model 23 Sectional Jib Arm, 21' (6.4m) Reach

SEVEN SIZES ALL IN ONE BOX

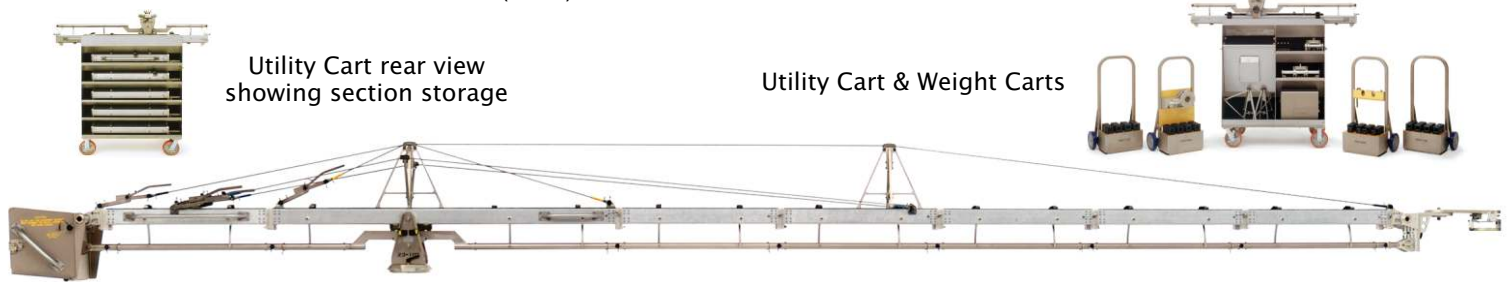

Please refer to the Jib Arm Brochure or our web site, www.jlfisher.com, for full specifications and options available

JIB20 Model 20 Jib Arm, 51.5" (131cm) Reach

JIB21 Model 21 Jib Arm, 68.5" (174cm) Reach

JIB22 Model 22 Jib Arm, 99.5" (253cm) Reach



Crossarms

CRA1 Crossarm, 11.5" (29cm) to 19" (48cm) Reach

CRA2 Crossarm, 15" (38cm) to 24" (61cm) Reach

CRA3 Crossarm, 18" (46cm) to 29" (74cm) Reach

CRA4 Crossarm, 23" (58cm) to 36" (91cm) Reach

CRA6 Crossarm, 31" (79cm) to 53" (135cm) Reach

CRA8 Crossarm, 40" (102cm) to 68" (173cm) Reach

CRA12 Crossarm, 54" (137cm) to 100" (254cm) Reach



Fluid Heads

WS2 Weaver/Steadman Fluid Head, 2 Axis

WS3 Weaver/Steadman Fluid Head, 3 Axis

V Vector 700 Fluid Head, 2 Axis



Other Accessories

BAZ Bazooka (Pneumatic or Sectional)

CM Center Mount with RJ12 Riser

CB Cue Board

HH High Hat


LA Lamp Adapter

MRD Monitor Rack

MLA Mitchell Lamp Adapter, Junior 1 1/8 in. (MLA)

PB Push Bar

UDJ Dolly Jack (uses Push Post for handle)



Wheels & Ice Skates

SK9 Ice Skates

SCW9 Soft Compound Wheels


SW9 Soft Wheels

TWR* Round Track Adapter

TWS* Square Track Adapter

SBWS Skateboard Wheels

DSBC Dexter Skateboard Wheels




*TWR & TWS for use only on straight track, round or square

Track & Track Accessories

Straight Track sections fold from 24.5" wide to 5" wide for easy transport and storage

Straight Track



	Length	Length (folded)	Weight
TR2	2' (.61m)	4.1' (1.3m)	11.8 lbs (5.4kg)
TR3	3' (.91m)	5.1' (1.6m)	15.0 lbs (6.8kg)
TR4	4' (1.2m)	6.1' (1.9m)	16.2 lbs (7.3kg)
TR6	6' (1.8m)	8.1' (2.5m)	23.8 lbs (10.8kg)
TR	8' (2.4m)	10.1' (3.0m)	30.2 lbs (13.7kg)
TR10	10' (3m)	12.1' (3.7m)	38.0 lbs (17.2kg)



TS Track Support



Round Tube Track 1.5" (3.8cm) Diameter


All J.L. Fisher track is on 24.5" (62.23cm) center line between rails.



Curved Track Diameters are Measured from Centerline Between Rails


Square tube dolly track, not shown here, is available in similar sizes and diameters as the round tube track. Please call J.L. Fisher for sizes and availability.

Curved Track

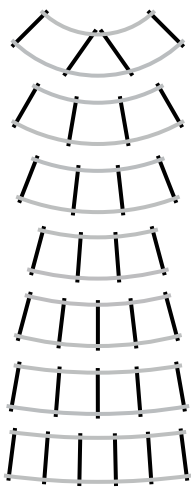

	Diameter Full Circle	Angle Section	Sections For Full Circle	Length* Section	Width* Section	Weight Section
CR10	10' (3m)	90°	4	8.7 ft (2.7m)	3.2 ft (.96m)	31.2 lbs (14.2kg)
CR15	15' (4.6m)	60°	6	8.5 ft (2.6m)	3.1 ft (.94m)	30.5 lbs (13.8kg)
CR	20' (6.1m)	45°	8	7.8 ft (2.4m)	3.0 ft (.91m)	29.0 lbs (13.2kg)
CR25	25' (7.6m)	30°	12	7.1 ft (2.2m)	2.8 ft (.85m)	27.8 lbs (12.6kg)
CR30	30' (9.1m)	30°	12	8.4 ft (2.6m)	2.9 ft (.88m)	33.8 lbs (15.3kg)
CR50	50' (15.2m)	20°	18	9.2 ft (2.8m)	2.8 ft (.85m)	34.5 lbs (15.6kg)
CR70	70' (21.3m)	15°	24	9.5 ft (2.9m)	2.8 ft (.85m)	38.8 lbs (17.6kg)

SKATEBOARD WHEELS




EACH SET OF 2 WHEELS (TRUCK) CAN SWIVEL INDEPENDENTLY





Model 9 Dolly shown with Skateboard Wheels (SBWS) on Round Curved Track (CR10)

* Example



RMPR
WED
TB

Track Ramp For Round Track
Track Wedges
Track Buckle

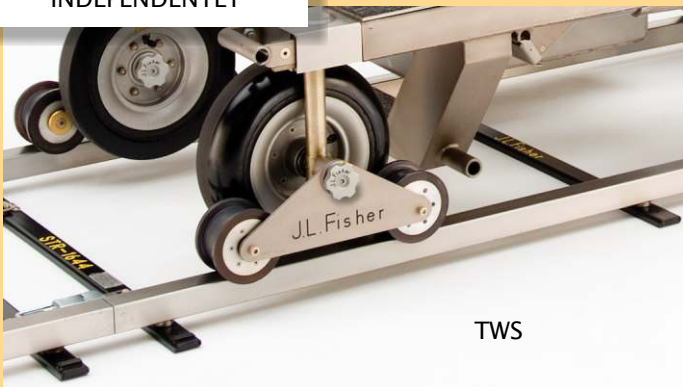

TWS



TWR

TRACK ADAPTERS ARE AVAILABLE FOR BOTH ROUND AND SQUARE STRAIGHT TRACK

TWS* AND TWR* HAVE POSITIVE LOCKING BRAKES



SPECIFICATIONS

Note: Due to variables such as adjustments and choice of risers, wheels, etc., these dimensions are approximate.



FOLDING CONTROLS


DIMENSIONS

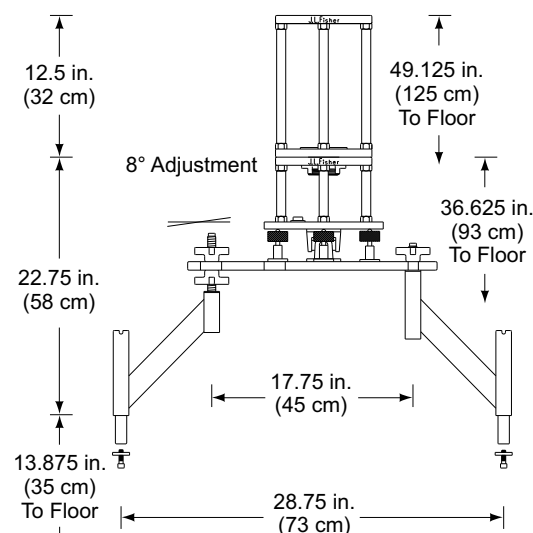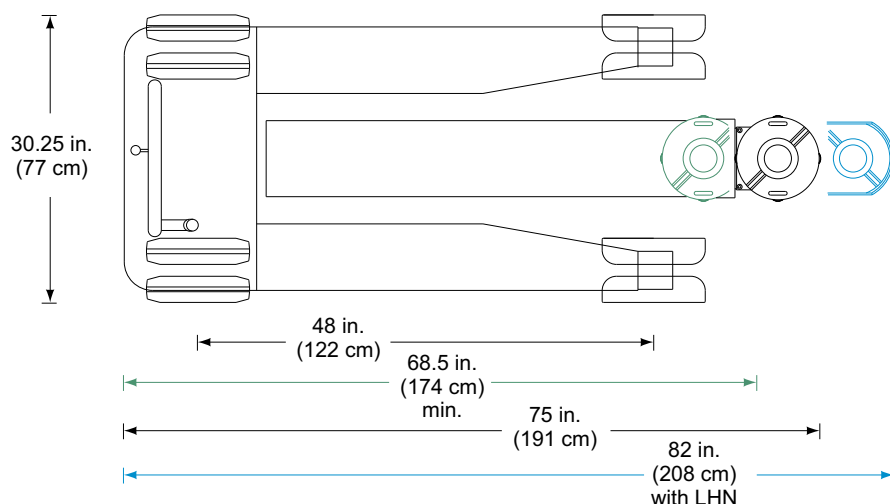

CENTER MOUNT (CM)

The Center Mount (CM), supports jib arms, lightweight camera booms and counterbalanced camera cranes. The Center Mount has thumbscrews for four-way leveling adjustment and a leveling indicator. Easily installed, the Center Mount has a standard Mitchell mount and comes with a heavy duty 12-inch Riser (RJ12).

The maximum gross load capacity is 1200 pounds (544 kg). Center Mount is not for supporting personnel or personnel carrying cranes.

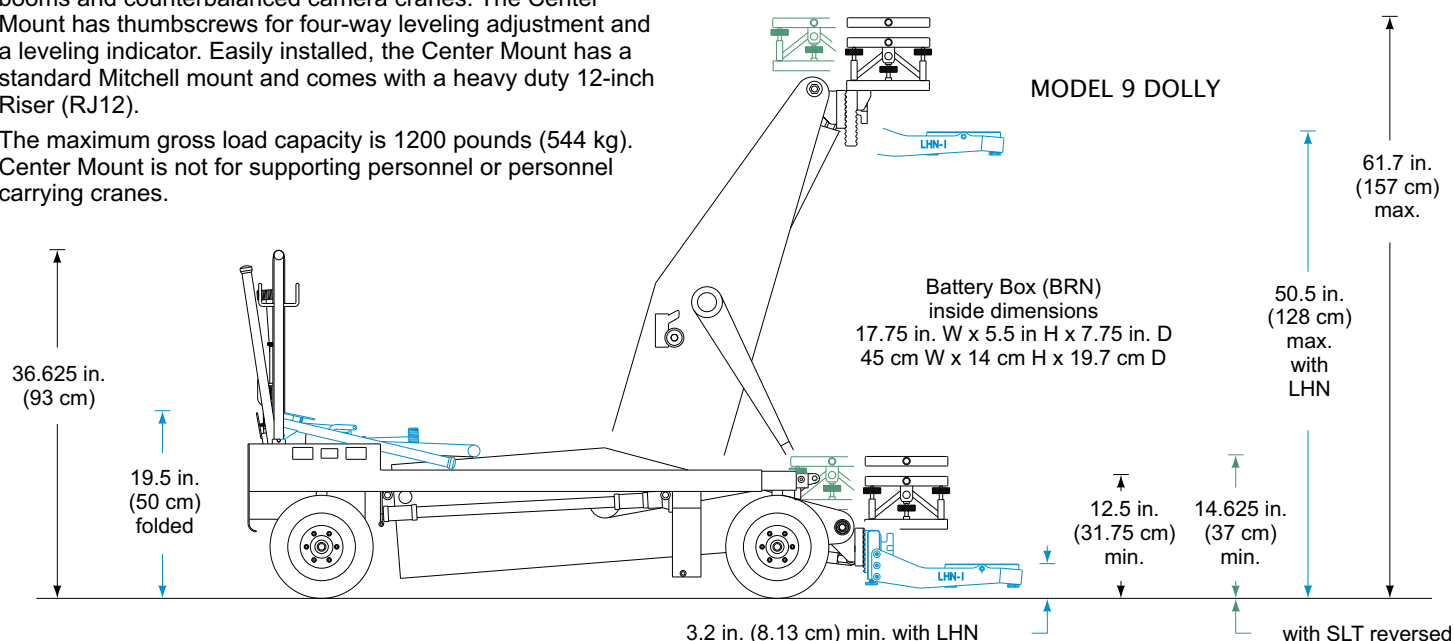

J.L. FISHER PRODUCTS ARE PROUDLY MADE IN BURBANK, CALIFORNIA U.S.A.

J.L. Fisher, GmbH Emil-Hoffmann-Str. 55-59 50996 Köln, Germany
Tel: +49 2236 3922 0 Fax: +49 2236 3922 12
Web: www.jlfisher.de e-mail: info@jlfisher.de

Printed in U.S.A. 2.09.2017